

G2

Smart Gateway

User Manual

TTLock



Table of Contents

Light Status Description

1

Bind the Gateway to the APP

2

Delete the Gateway

3

Light Status Description

1

① After the device is powered on:

Status Light

The red and blue indicators flash alternately: ready state, currently available to be added and bound by the APP.

Red

Poor network, unable to communicate with the server.


Blue

Normal working status, cannot be bound.


Bind the Gateway to the APP

2


- ① Connect the gateway to the power supply and open the **"TT Lock"** APP.
- ② Tap **"+"**.
- ③ Tap **"G2 (WI-FI)"**.
- ④ The gateway indicator flashes red and blue alternately, tap **"Next"**.
- ⑤ The G2 device is displayed, tap **"+"**.
- ⑥ Tap **"WiFi Name"** to select an available WiFi, enter the WiFi password, enter the Gateway Name, then tap **"OK"**.
(IMPORTANT: Only 2.4GHz WiFi can be used)
- ⑦ The gateway automatically searches for and connects to devices already bound in the APP.

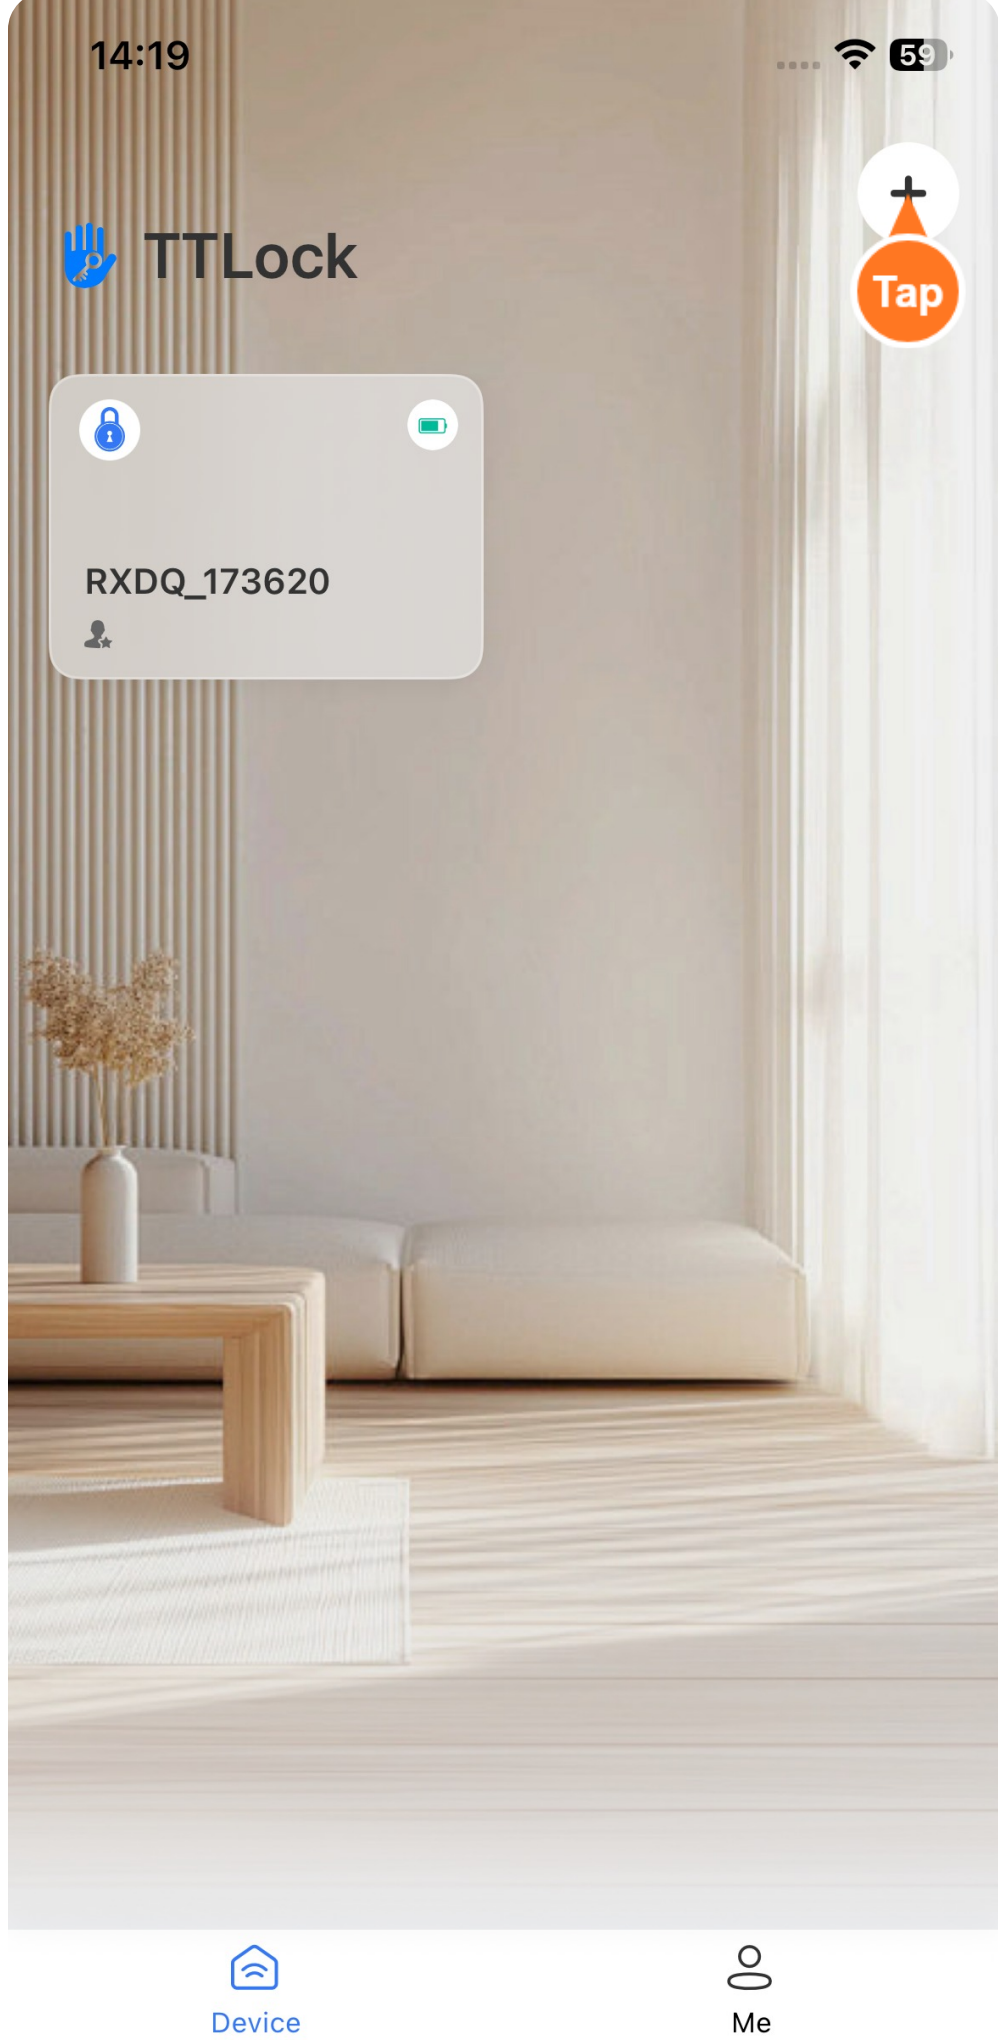


② Tap "+".

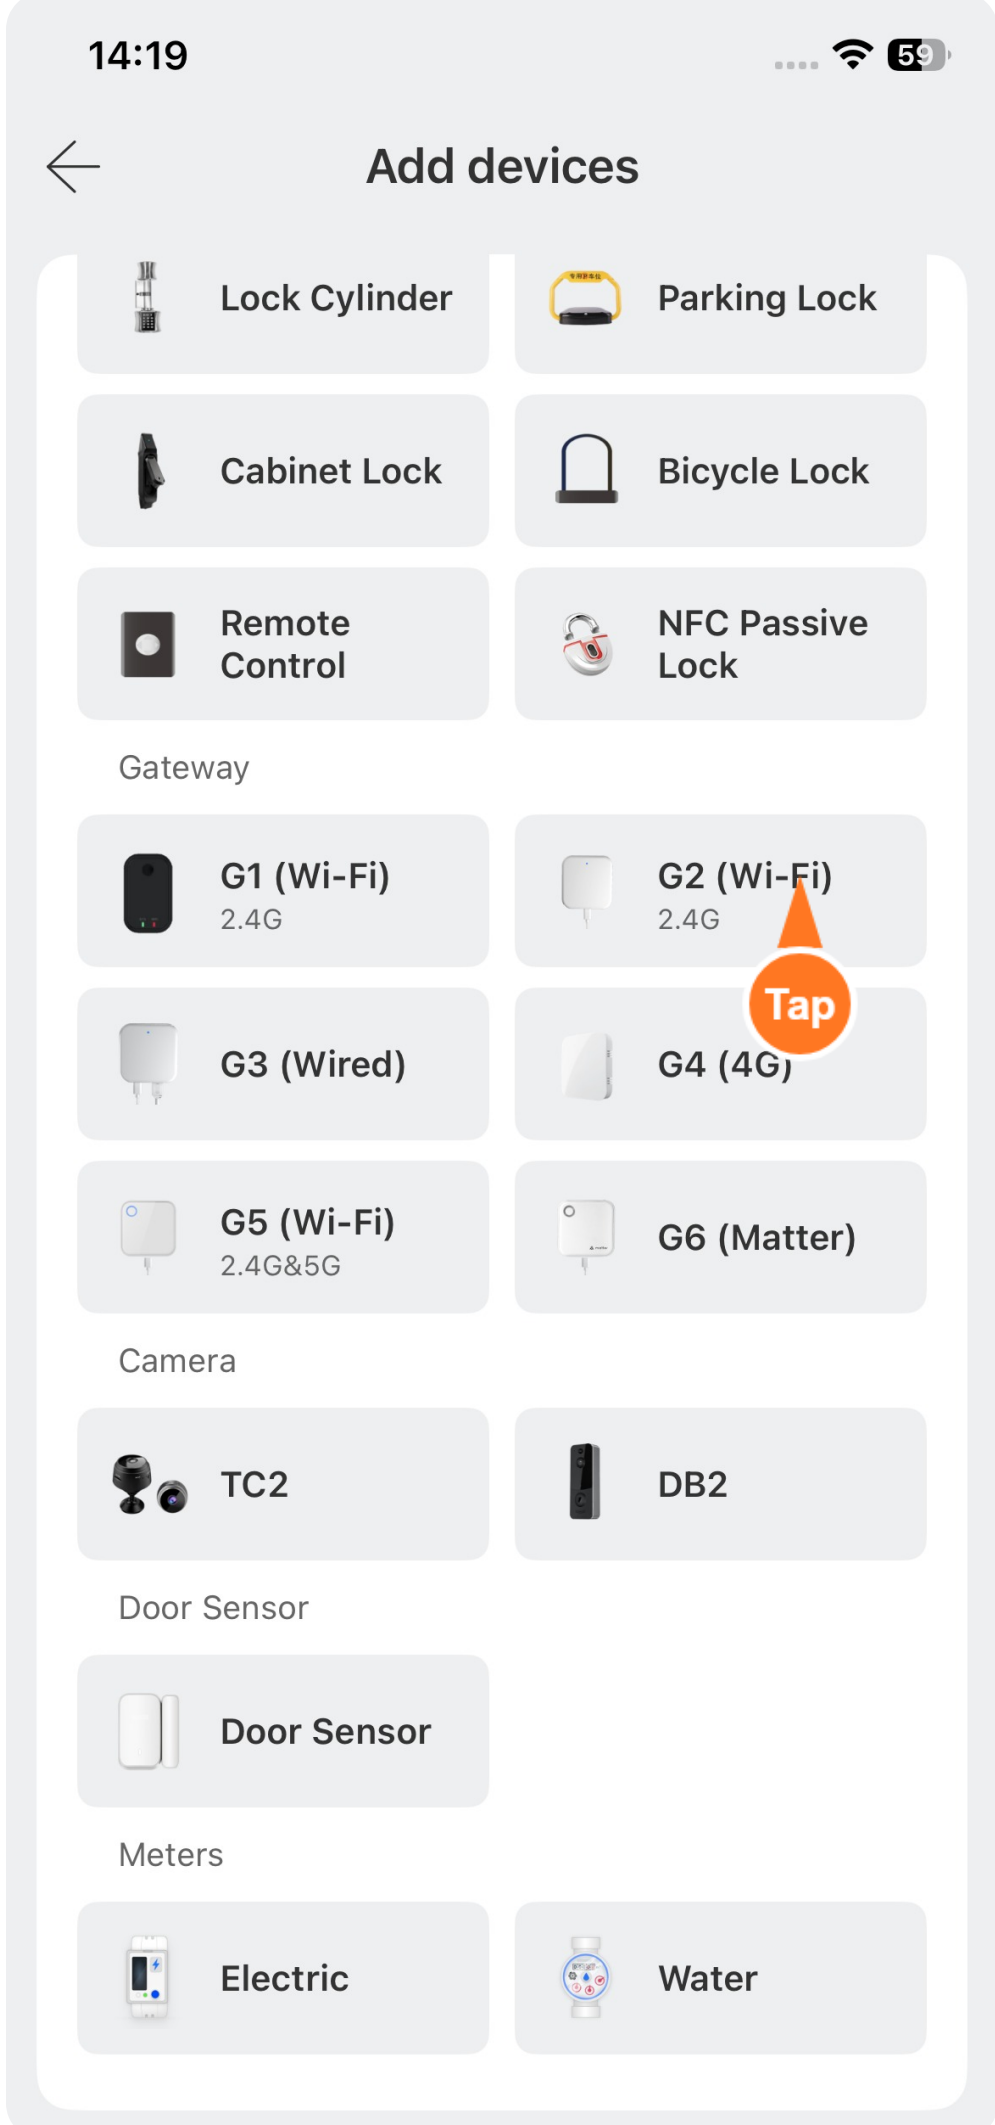


③ Tap "G2 (WI-FI)".

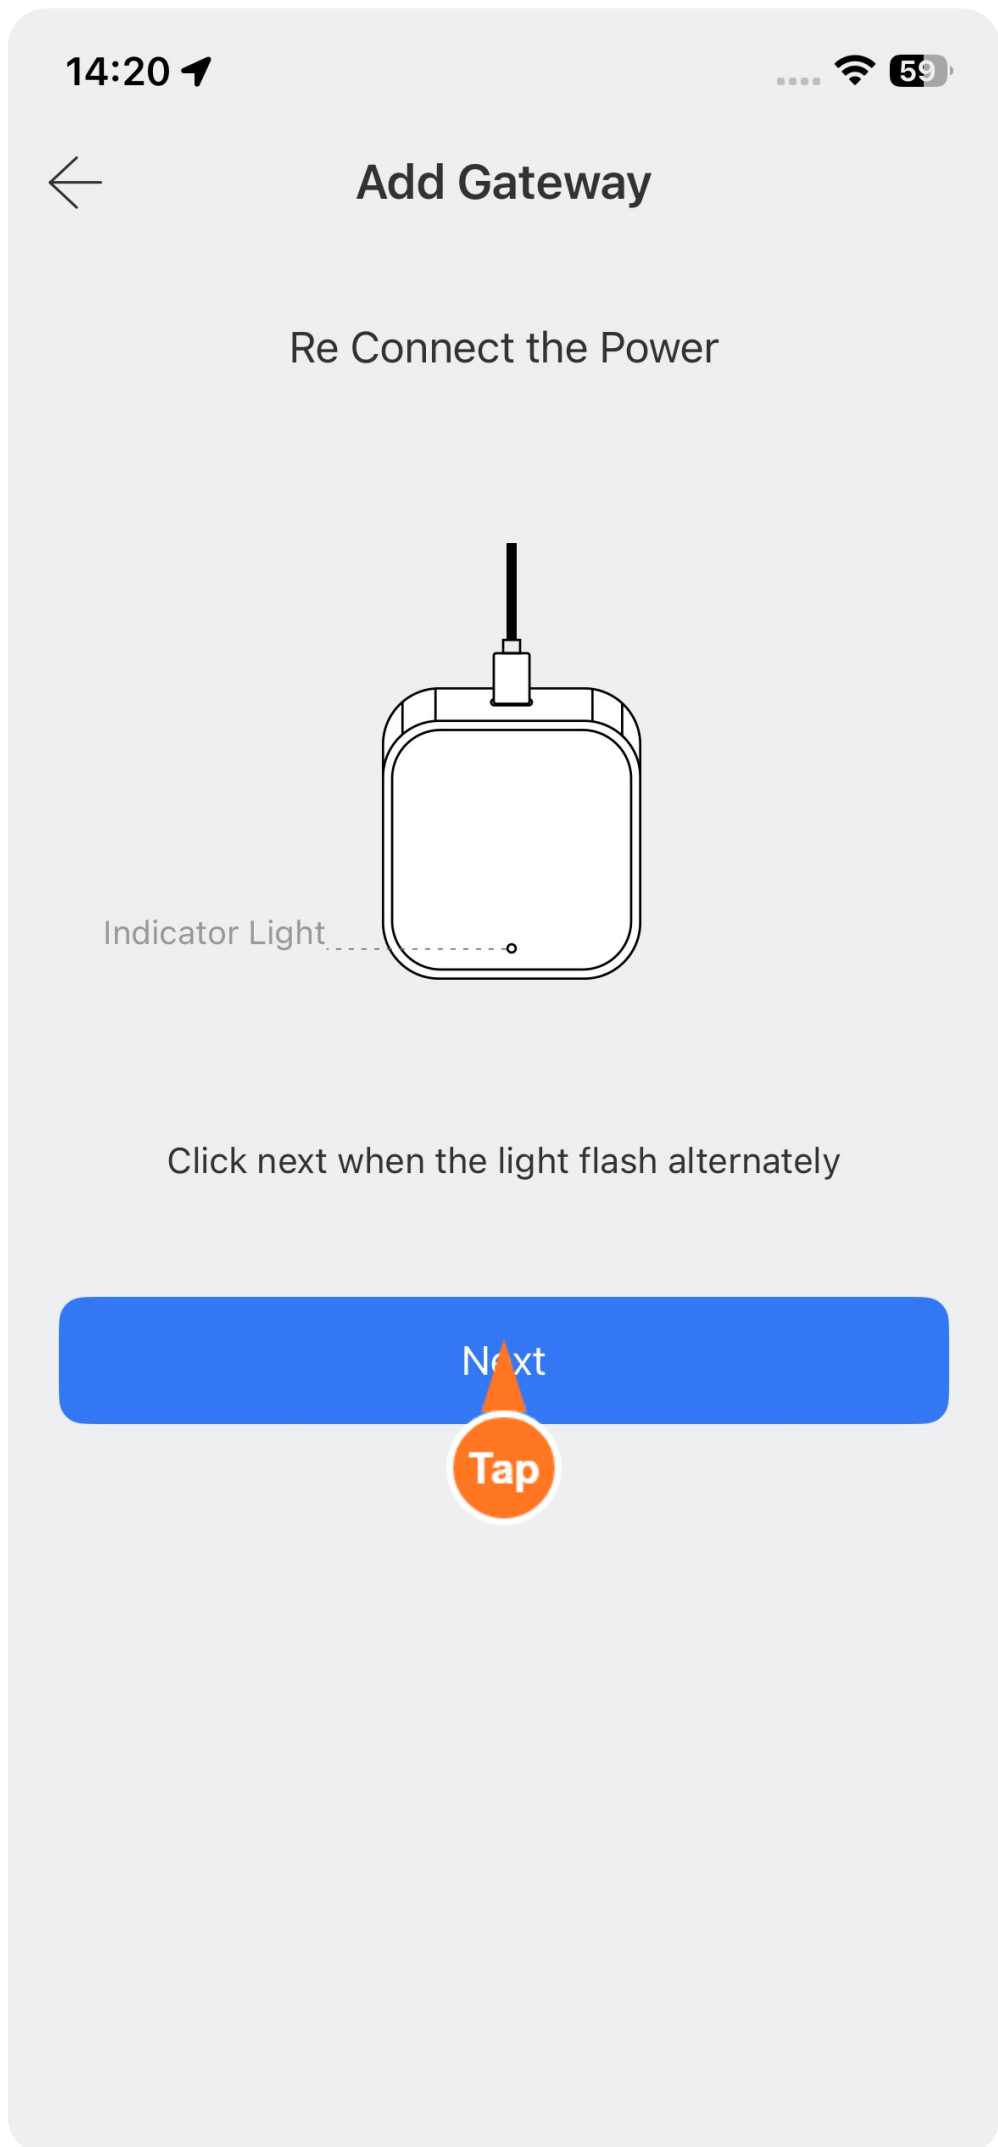


④ Tap "Next".

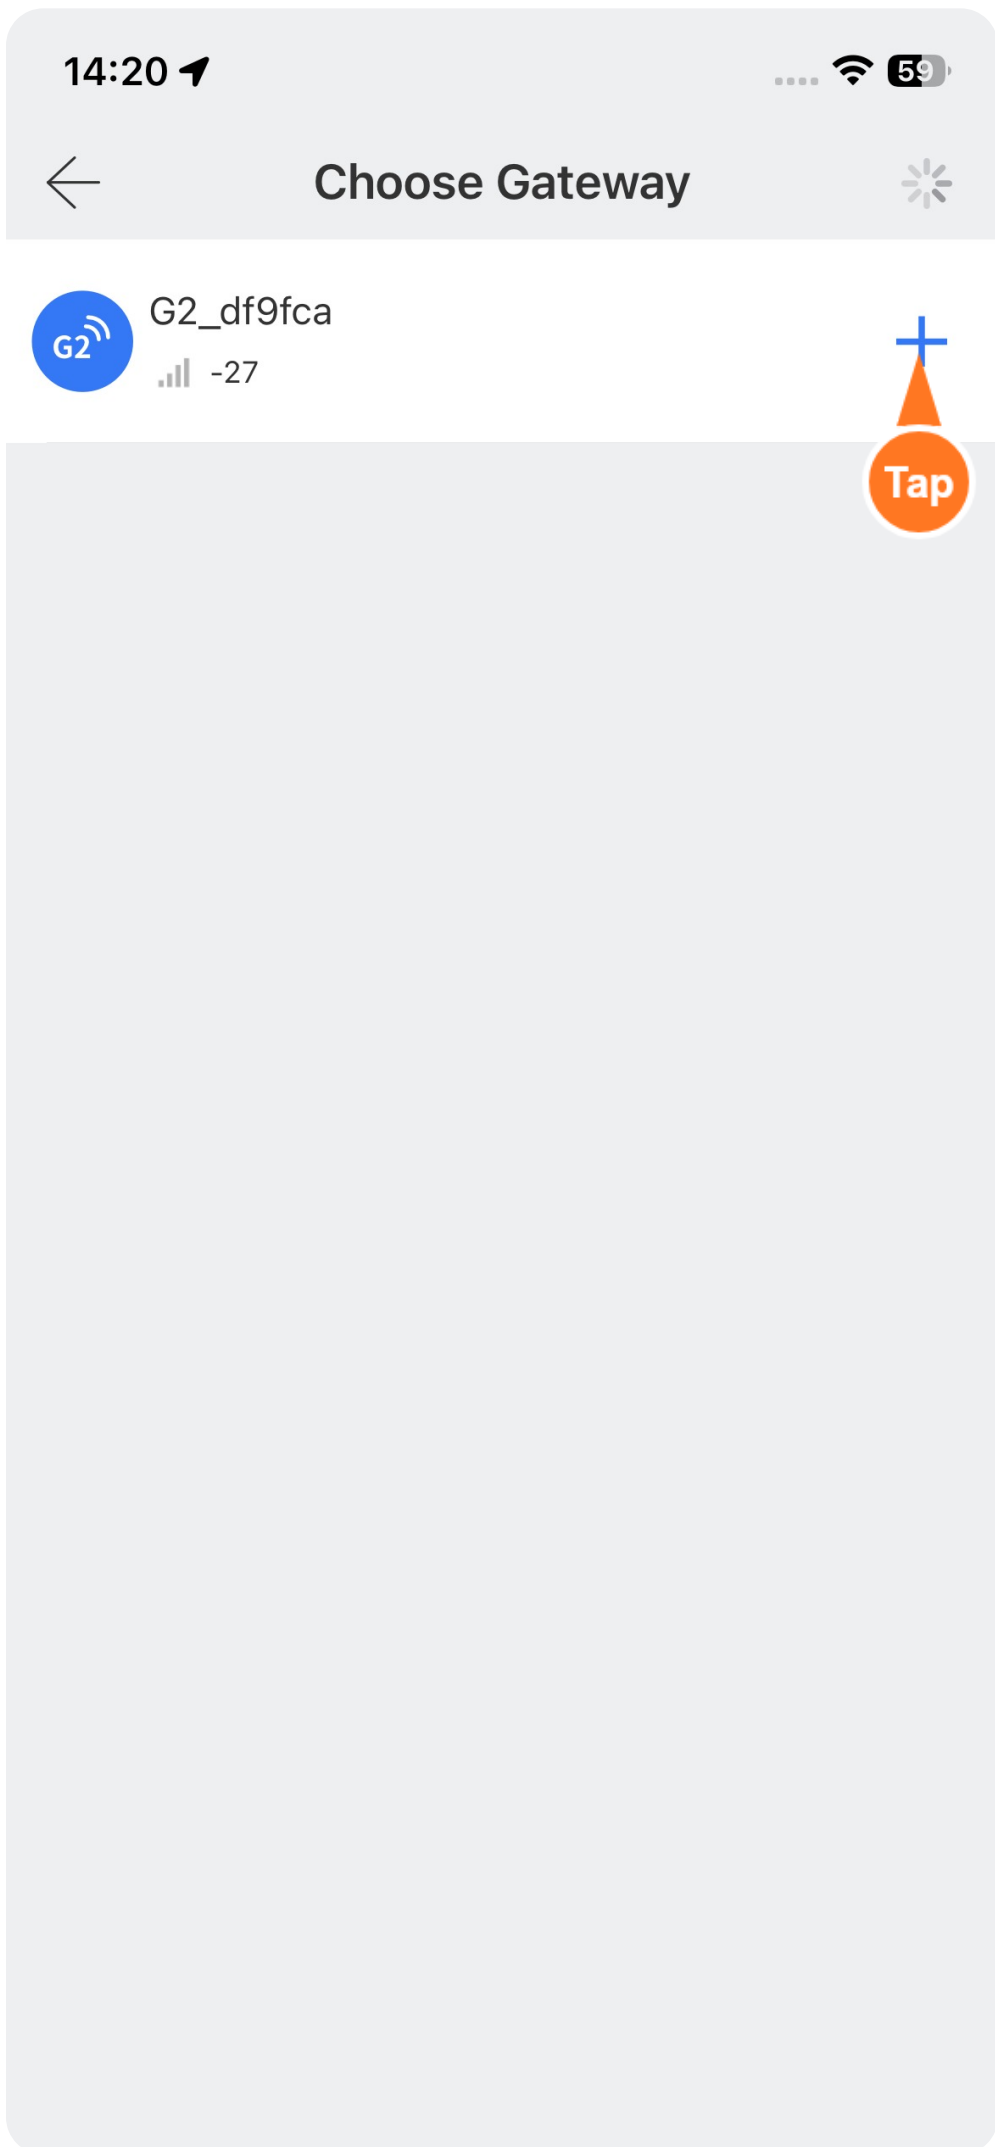

⑤ Tap "+".

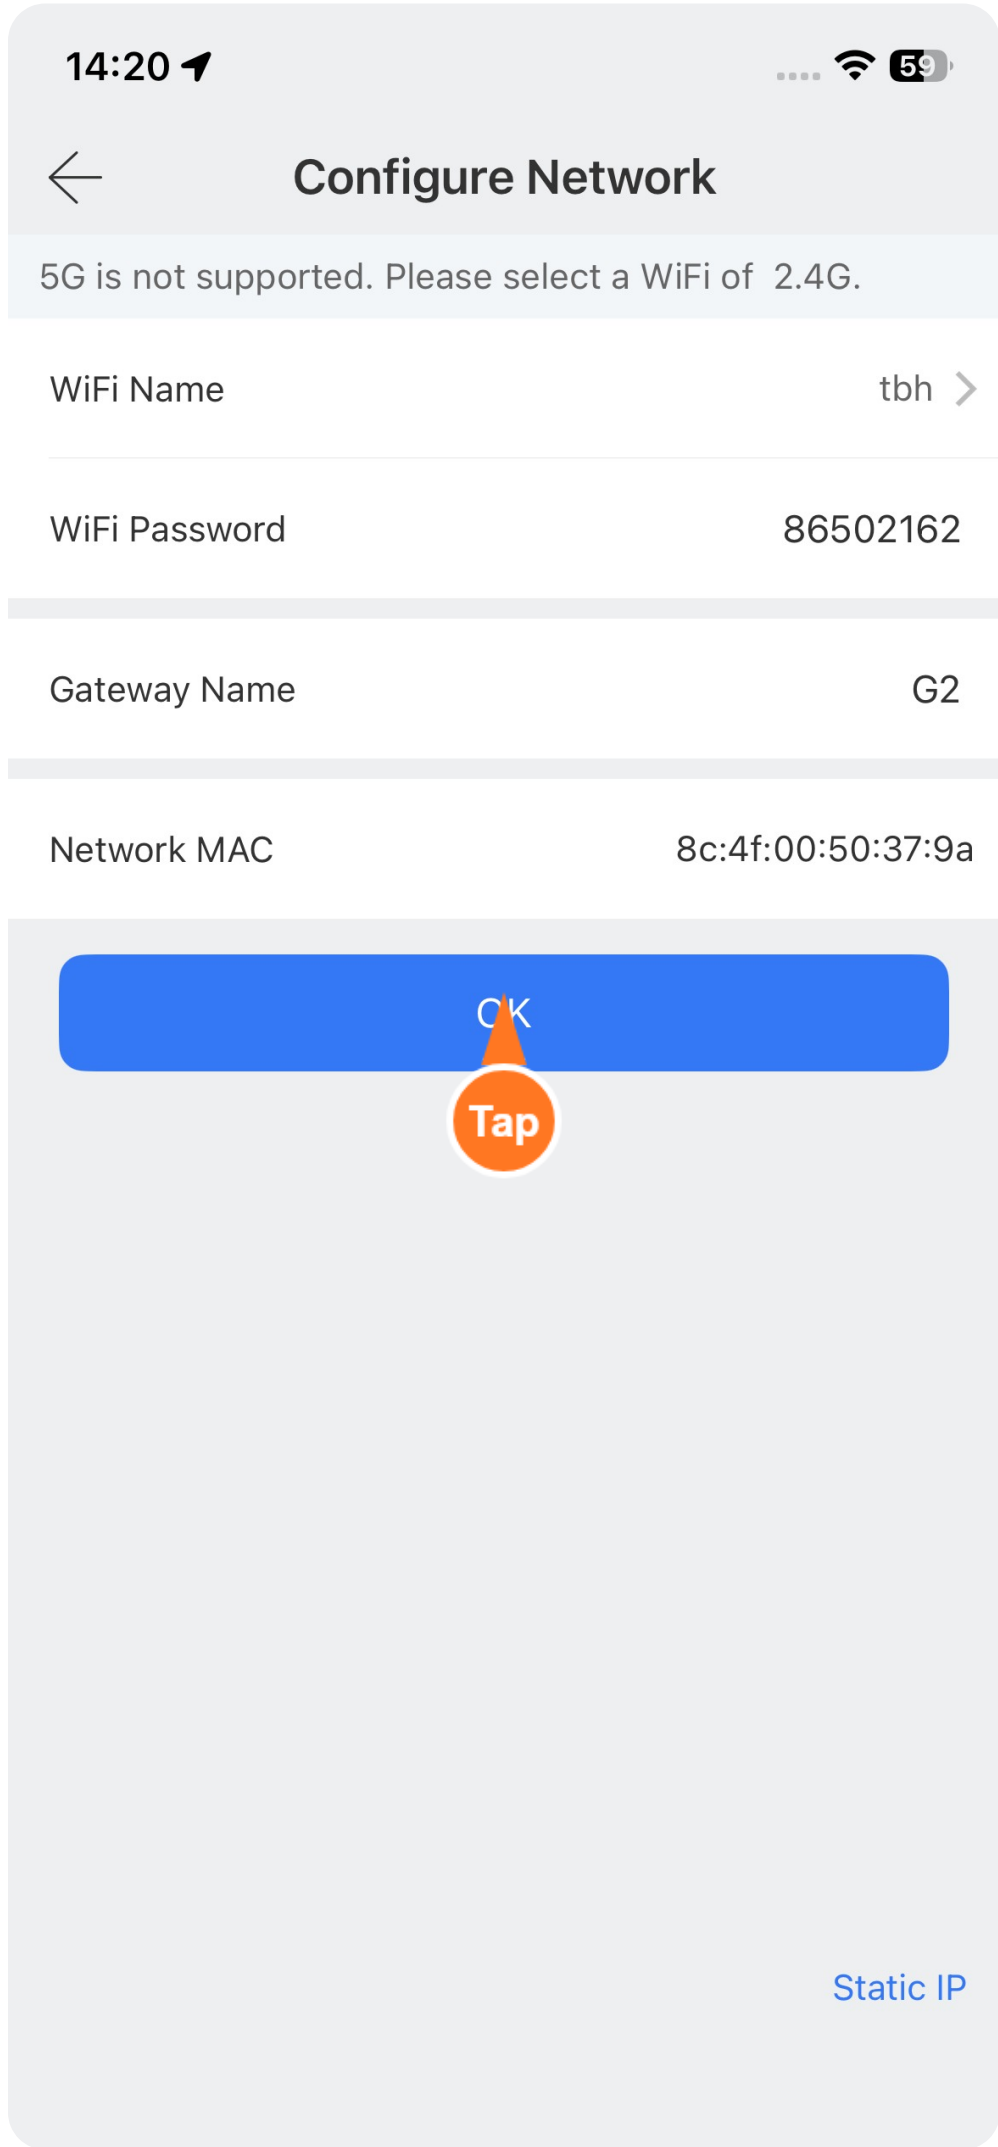

⑥ Enter the WiFi password, then tap "OK".

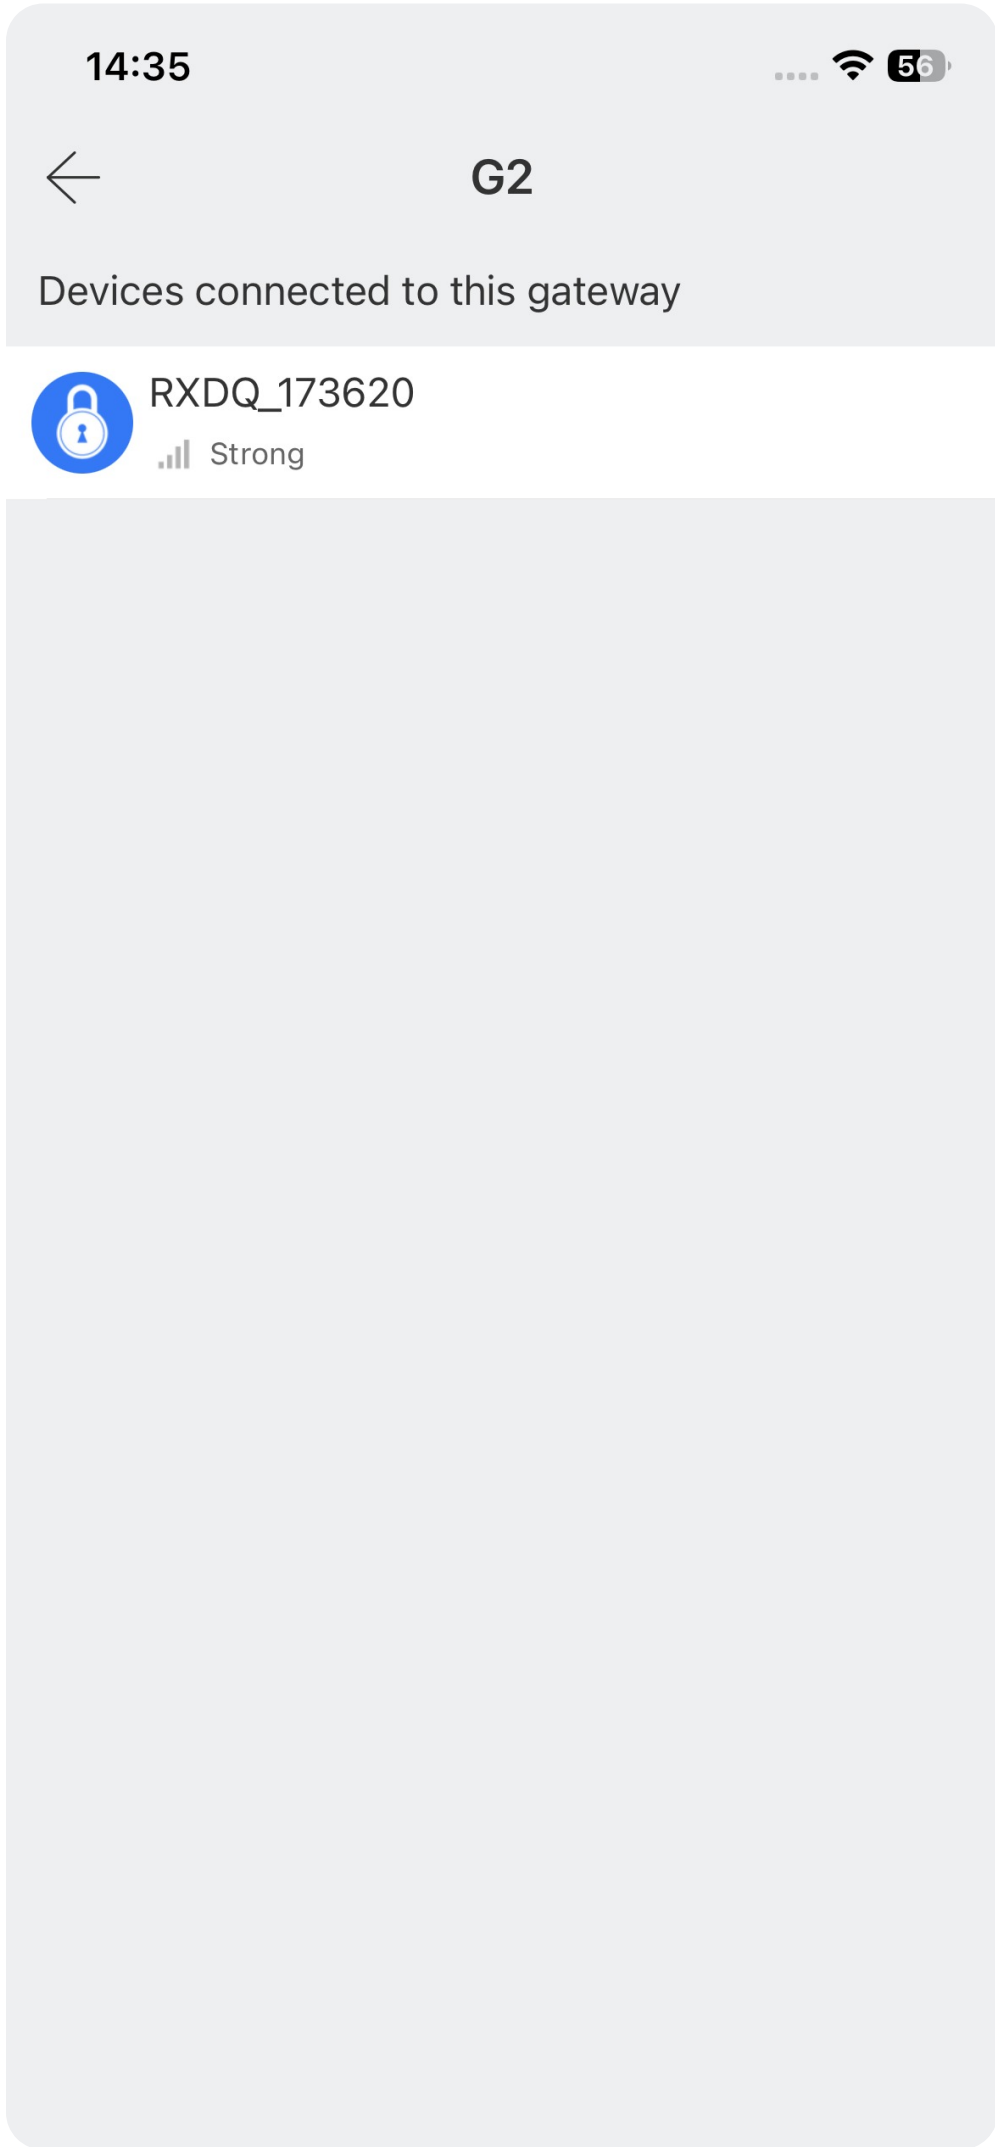


⑦ Devices connected to this gateway.


Delete the Gateway

3


- 1 Select the gateway to be deleted.
- 2 Tap **"Delete"**.
- 3 Confirm the deletion.

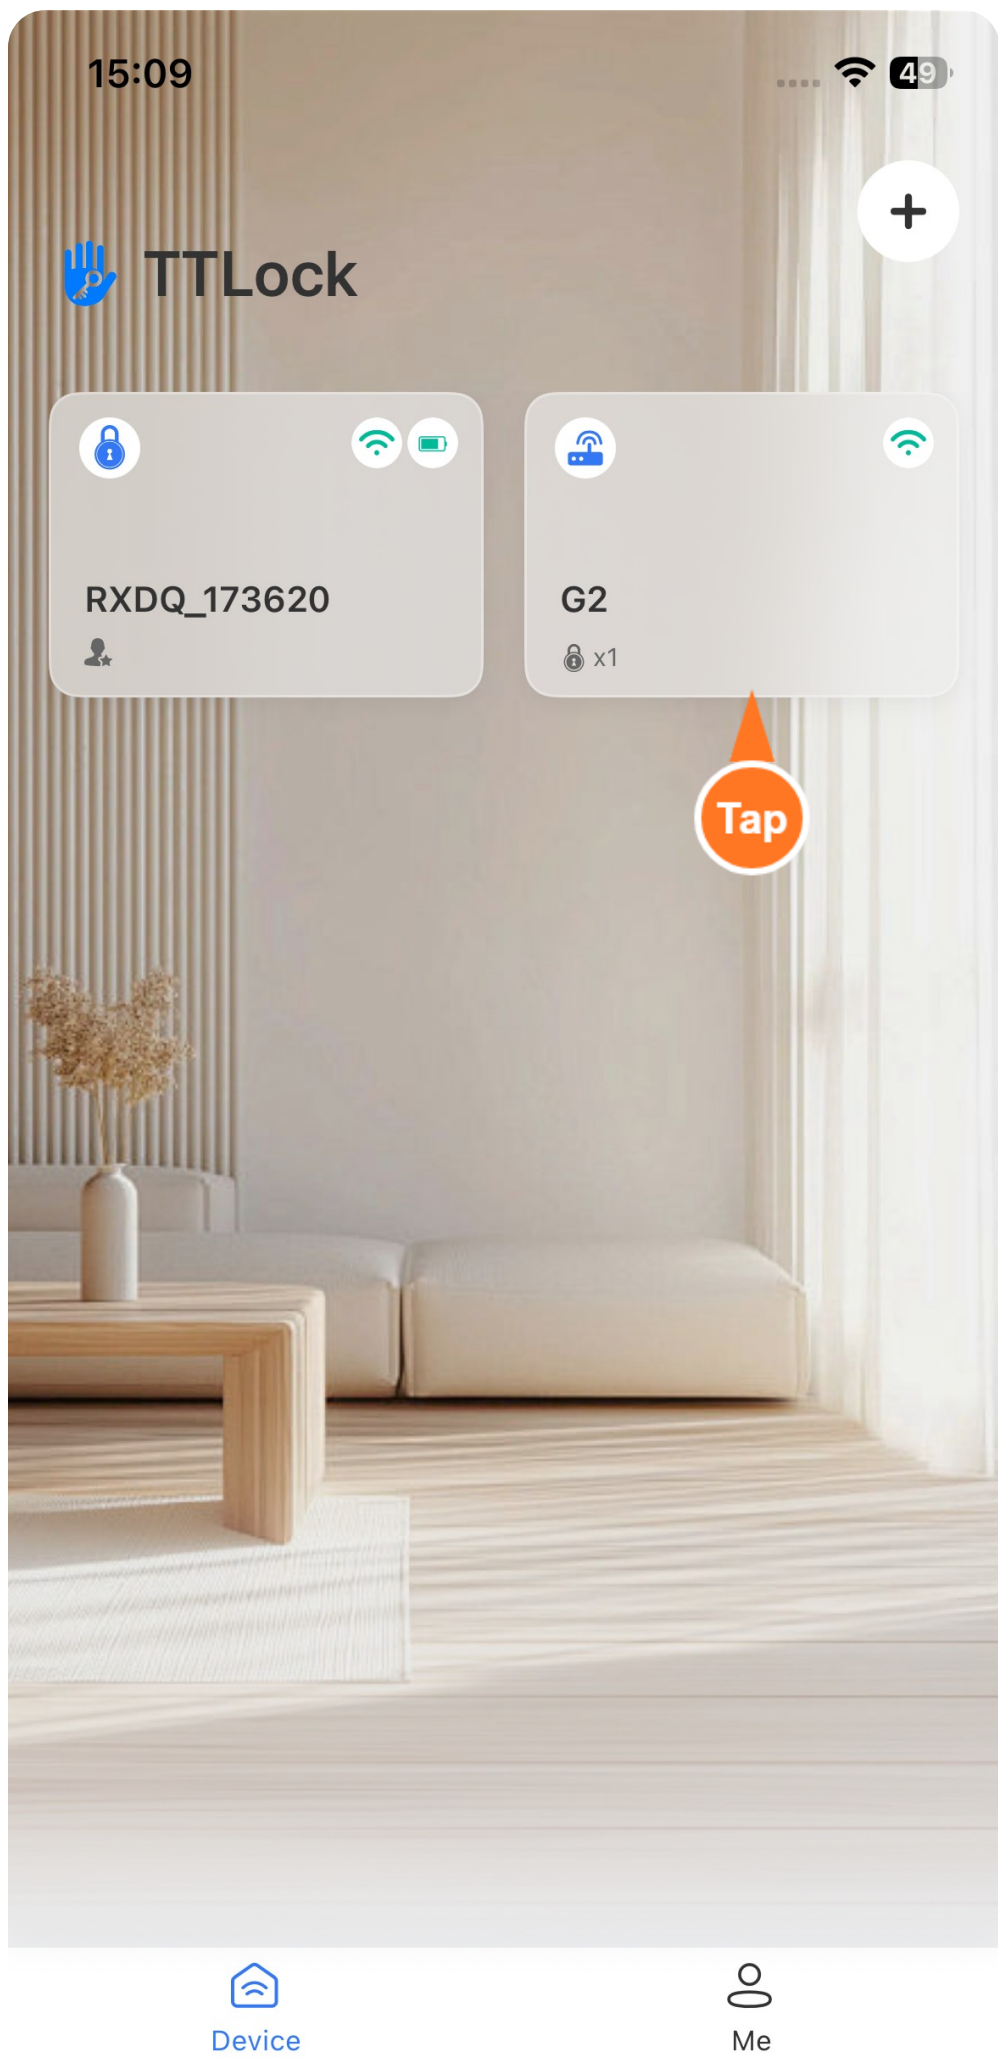

- 1 Select the gateway.

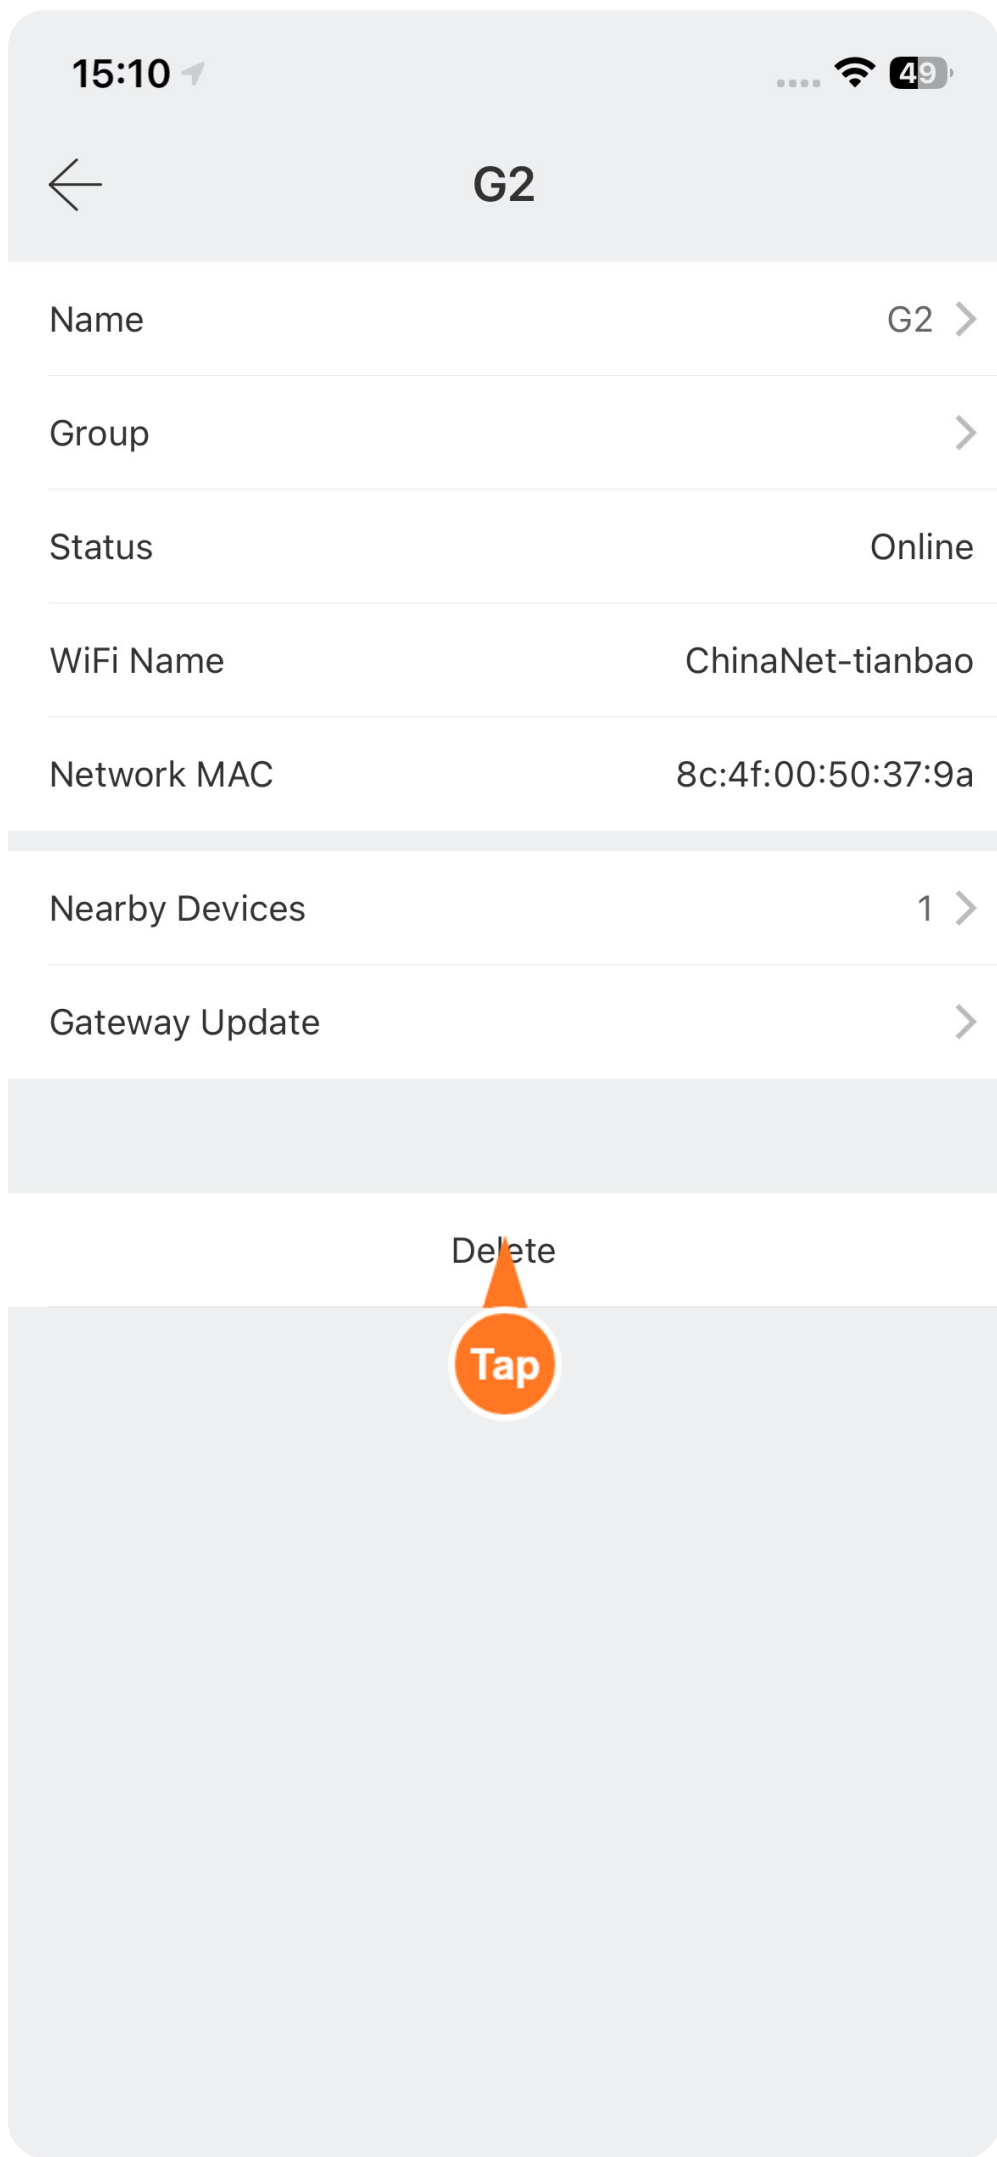

- 2 Tap **"Delete"**.

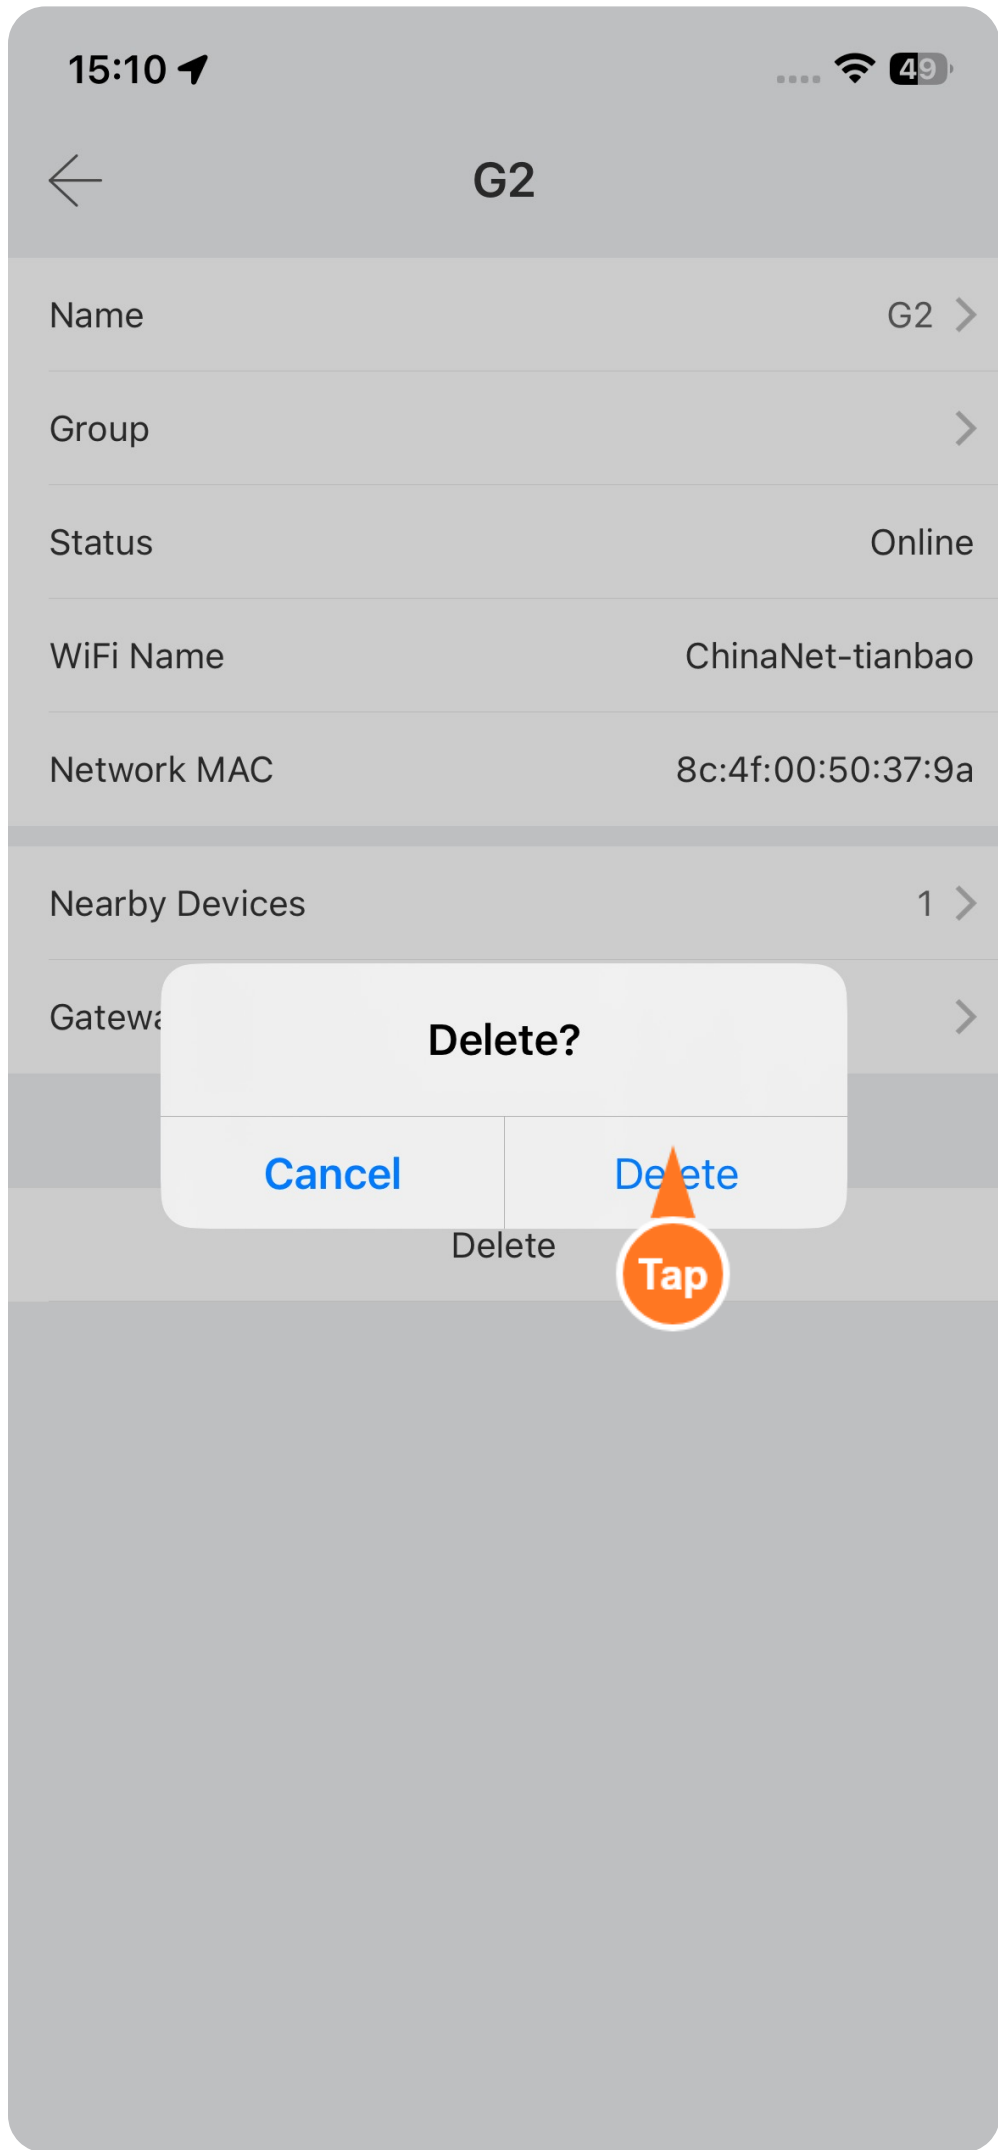

- 3 Confirm the deletion.

B L U S A F E

G2 — Smart Gateway
TTLock app